

Gokin

GBC Standard Module with
Single Glass
GK-3-72HG

640-670W

- Superior Temperature coefficient
- Higher Generated Energy
- Higher Reliability
- Lower BOS
- Excellent Micro-crack Resistance
- High Temperature Restriction
- Partial Shading Optimisation
- Extraordinary Aesthetic Design

24.8%

Module Efficiency up to

≤1% First-year Degradation

≤0.35% Annual Degradation



Product Warranty



Linear Power Warranty




- Operating Temperature $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Power Tolerance $0 \sim +3\%$
- Junction Box IP68
- NOCT $45 \pm 2^{\circ}\text{C}$
- Maximum Series Fuse Rating 25A
- Maximum System Voltage 1500V(IEC)

Mechanical Parameters

Cell Type	GBC
No. of cells	144 (6×24)
Glass	3.2 mm tempered glass
Frame	Anodized aluminum
Output Cables	TüV 1×4mm², (+)300mm, (-)200mm or Customized Length
Weight	28.1kg (61.95lbs)
Dimension	2382×1134×30mm
Connector	MC4 Compatible/MC4-Evo2
Packaging	37 pcs per pallet 148 pcs per 20' GP, 740 pcs per 40' HC
Protection Class	Class II
Fire Rating	IEC Class C


Engineering Drawings

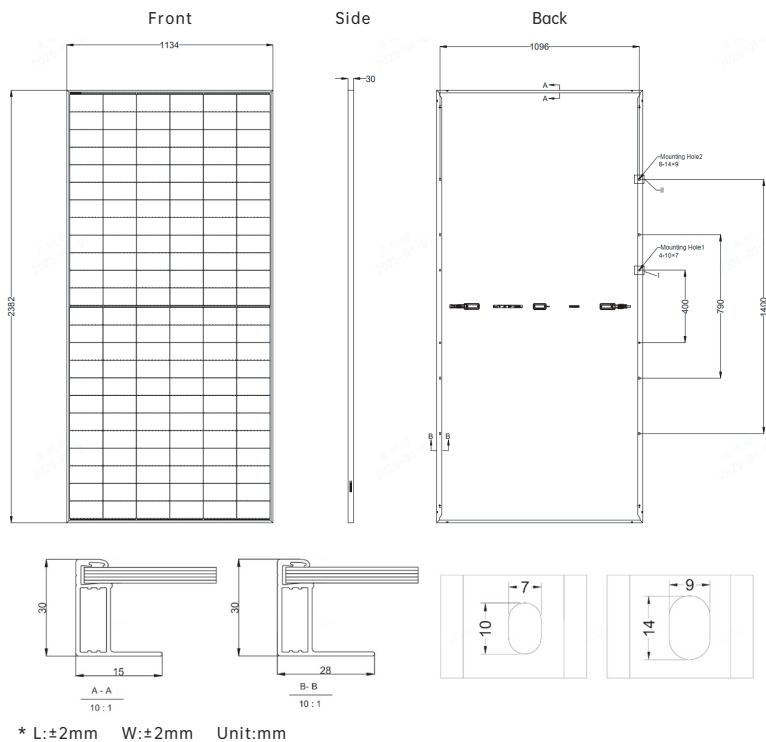

Electrical Characteristics (STC Test)

Module Type	GK-3-72HG-640M		GK-3-72HG-645M		GK-3-72HG-650M		GK-3-72HG-655M		GK-3-72HG-660M		GK-3-72HG-665M		GK-3-72HG-670M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	640	482	645	486	650	490	655	493	660	497	665	501	670	505
Open-circuit Voltage (Voc/V)	54.20	51.18	54.30	51.28	54.40	51.37	54.50	51.47	54.60	51.56	54.70	51.66	54.80	51.75
Maximum Power Voltage (Vmp/V)	44.90	42.40	45.00	42.50	45.10	42.59	45.20	42.69	45.30	42.78	45.40	42.87	45.50	42.97
Short-circuit Current (Isc/A)	15.00	12.13	15.06	12.18	15.12	12.23	15.18	12.28	15.24	12.32	15.30	12.37	15.36	12.42
Maximum Power Current (Imp/A)	14.26	11.38	14.34	11.44	14.42	11.51	14.50	11.57	14.57	11.63	14.65	11.69	14.73	11.76
Module Efficiency (%)	23.7		23.9		24.1		24.2		24.4		24.6		24.8	

- 1、STC: Irradiance 1000W/M², Cell Temperature25°C, AM=1.5 2、NOCT: Irradiance 800W/M², Ambient Temperature 20°C, AM=1.5, Wind Speed 1M/S

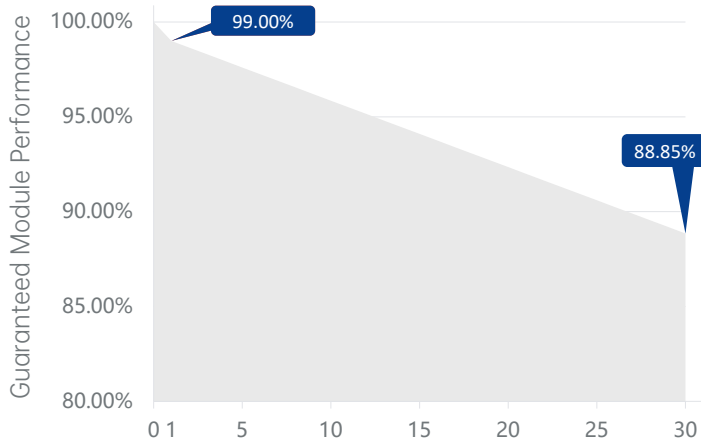

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Pmax	-0.26%/°C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25 mm diameter hail at 23 m/s