

Gokin

GBC Module with Single Glass
Full-screen GK-3-72HGF

660-675W



Full-screen



High Efficiency



Anti-fire



Anti-covering

15

15 Years Product Warranty

30

30 Years Linear Power Warranty



25.0%

Module Efficiency up to

≤1% First-year Degradation

≤0.35% Annual Degradation




- Operating Temperature **-40°C ~ +85°C**
- Power Tolerance **0~+3%**
- Junction Box **IP68**
- NOCT **45±2°C**
- Maximum Series Fuse Rating **25A**
- Maximum System Voltage **1500V(IEC)**

Mechanical Parameters

Cell Type	GBC
No. of cells	144 (6×24)
Glass	3.2 mm tempered glass
Frame	Anodized aluminum
Output Cables	TüV 1×4mm², (+)300mm, (-)200mm or Customized Length
Weight	28.1kg (61.95lbs)
Dimension	2382×1134×30mm
Connector	MC4 Compatible/MC4-Evo2
Packaging	37 pcs per pallet 148 pcs per 20' GP, 740 pcs per 40' HC
Protection Class	Class II
Fire Rating	IEC Class C

Engineering Drawings

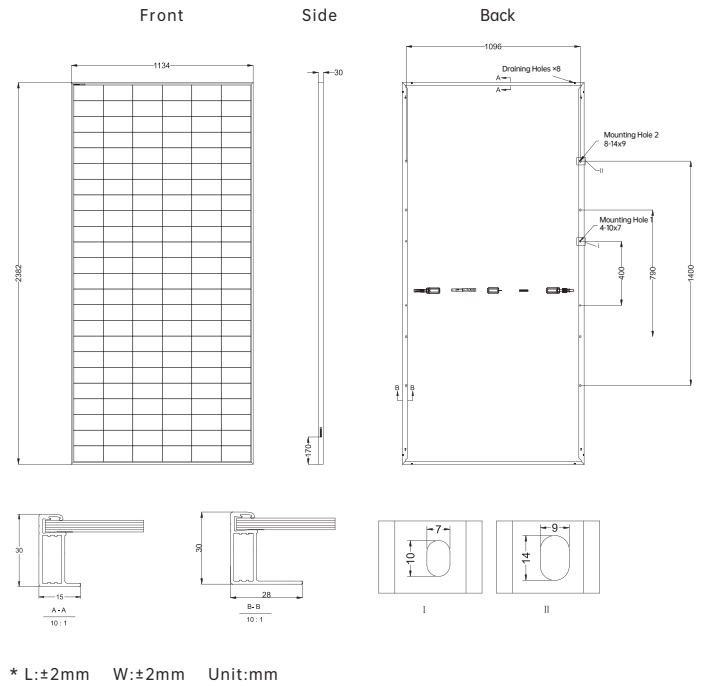


Electrical Characteristics (STC Test)

Module Type	GK-3-72HGF-660M		GK-3-72HGF-665M		GK-3-72HGF-670M		GK-3-72HGF-675M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	660	500	665	504	670	508	675	512
Open-circuit Voltage (Voc/V)	54.20	51.43	54.30	51.53	54.40	51.63	54.50	51.73
Maximum Power Voltage (Vmp/V)	45.50	43.17	45.60	43.27	45.70	43.37	45.80	43.47
Short-circuit Current (Isc/A)	15.18	12.27	15.24	12.32	15.30	12.37	15.36	12.42
Maximum Power Current (Imp/A)	14.51	11.60	14.59	11.66	14.67	11.72	14.74	11.78
Module Efficiency (%)	24.4		24.6		24.8		25.0	

1、STC: Irradiance 1000W/M², Cell Temperature 25°C, AM=1.5

2、NOCT: Irradiance 800W/M², Ambient Temperature 20°C, AM=1.5, Wind Speed 1M/S

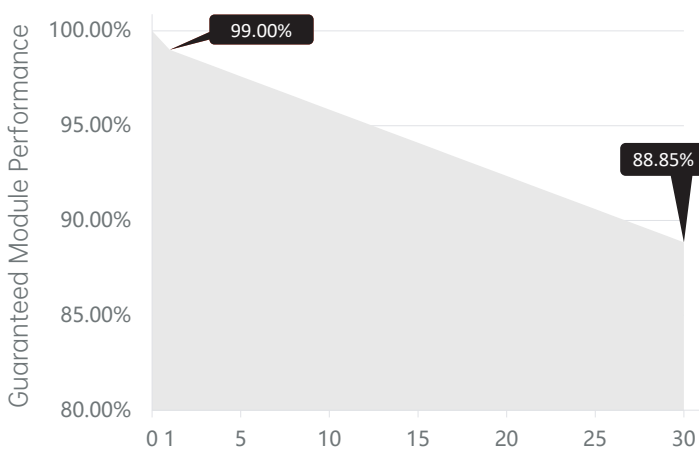

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Pmax	-0.26%/°C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25 mm diameter hail at 23 m/s